

BRICO - Installation screen 8 "of restyling

<https://www.clubseattleon.net/viewtopic.php?f=40&t=120529>

BRICO - Installation screen 8 "of restyling

by **red**

Page **1** of **16**

Posted: **11 Jan 2017, 18:54**


Hello everyone,


I leave a shop for anyone who wants to change their 6.5 "screen to the 8" of the restyling, and say the 6.5 "because the 5F unit is compatible with the new screen, not being the same 5.8 "which would also have to change the glovebox module.

I present the pantallon: The connection is the same is to remove and put, we just have to cut the plastic wing where it is housed so that it is flush with the air diffusers. Let's start by removing the screen: Once removed we remove the bezel carefully, as it is quite flimsy apparently ... it is only subject to pressure clamps:






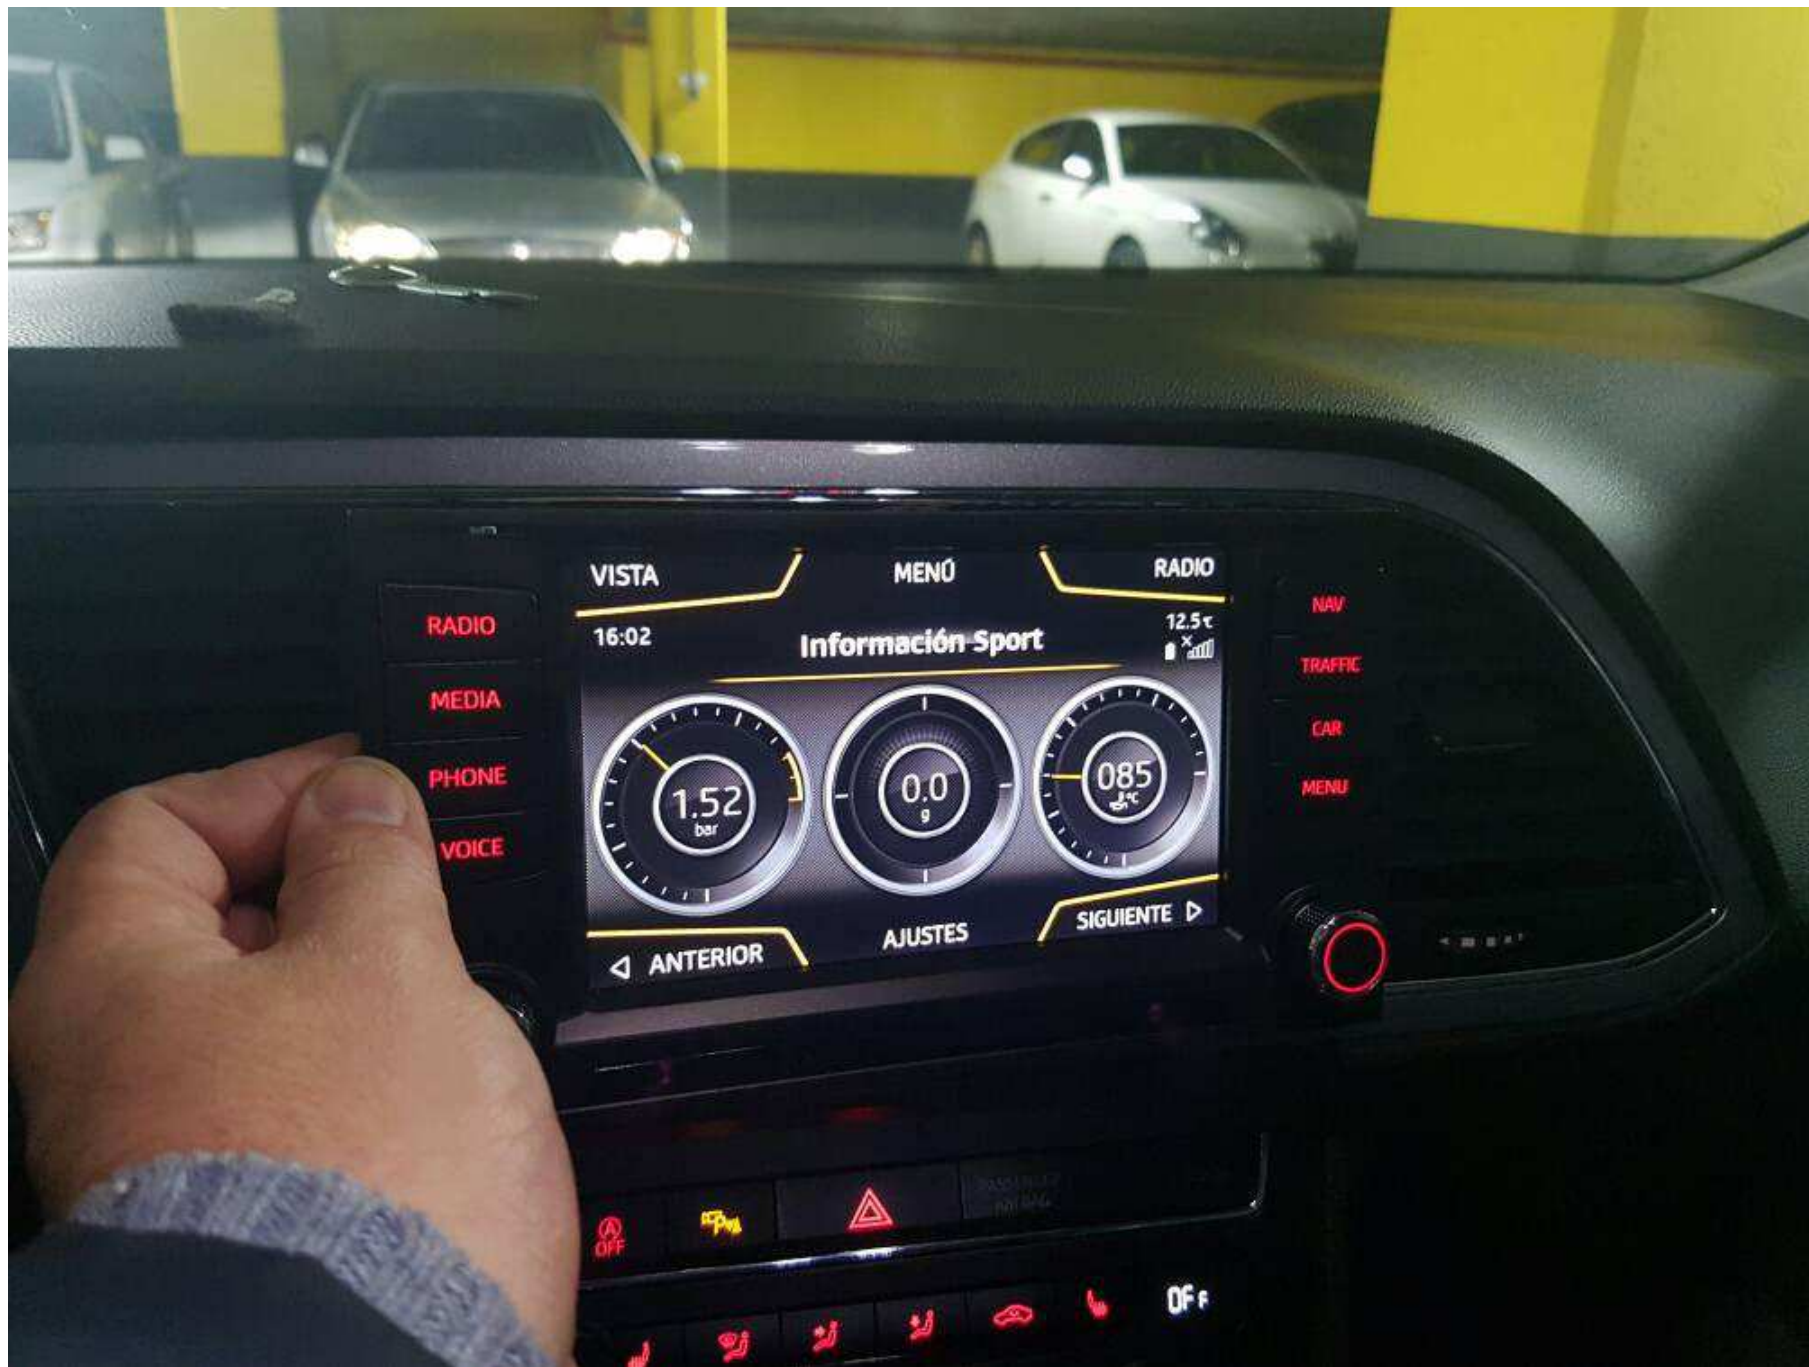

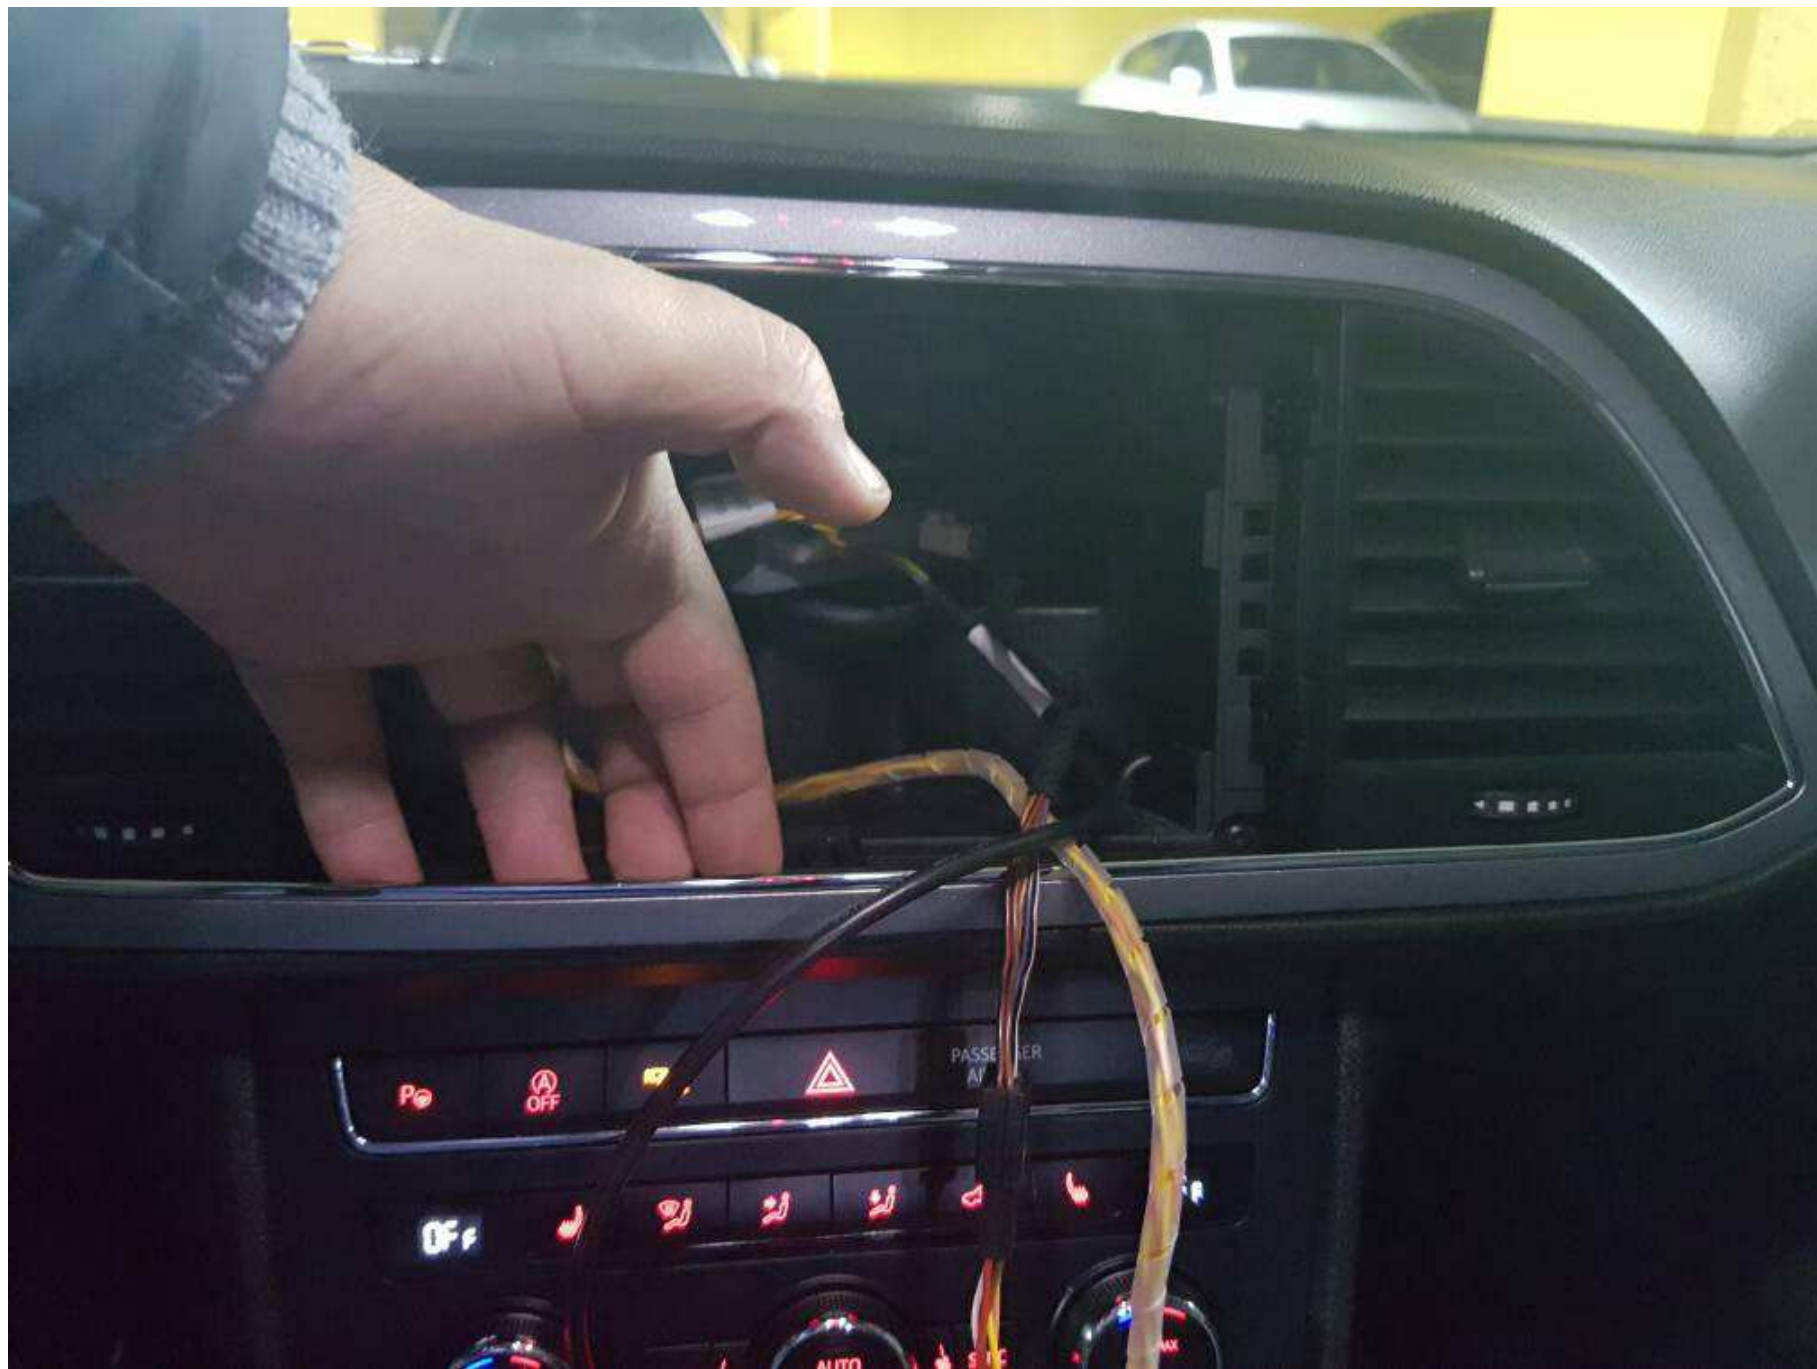




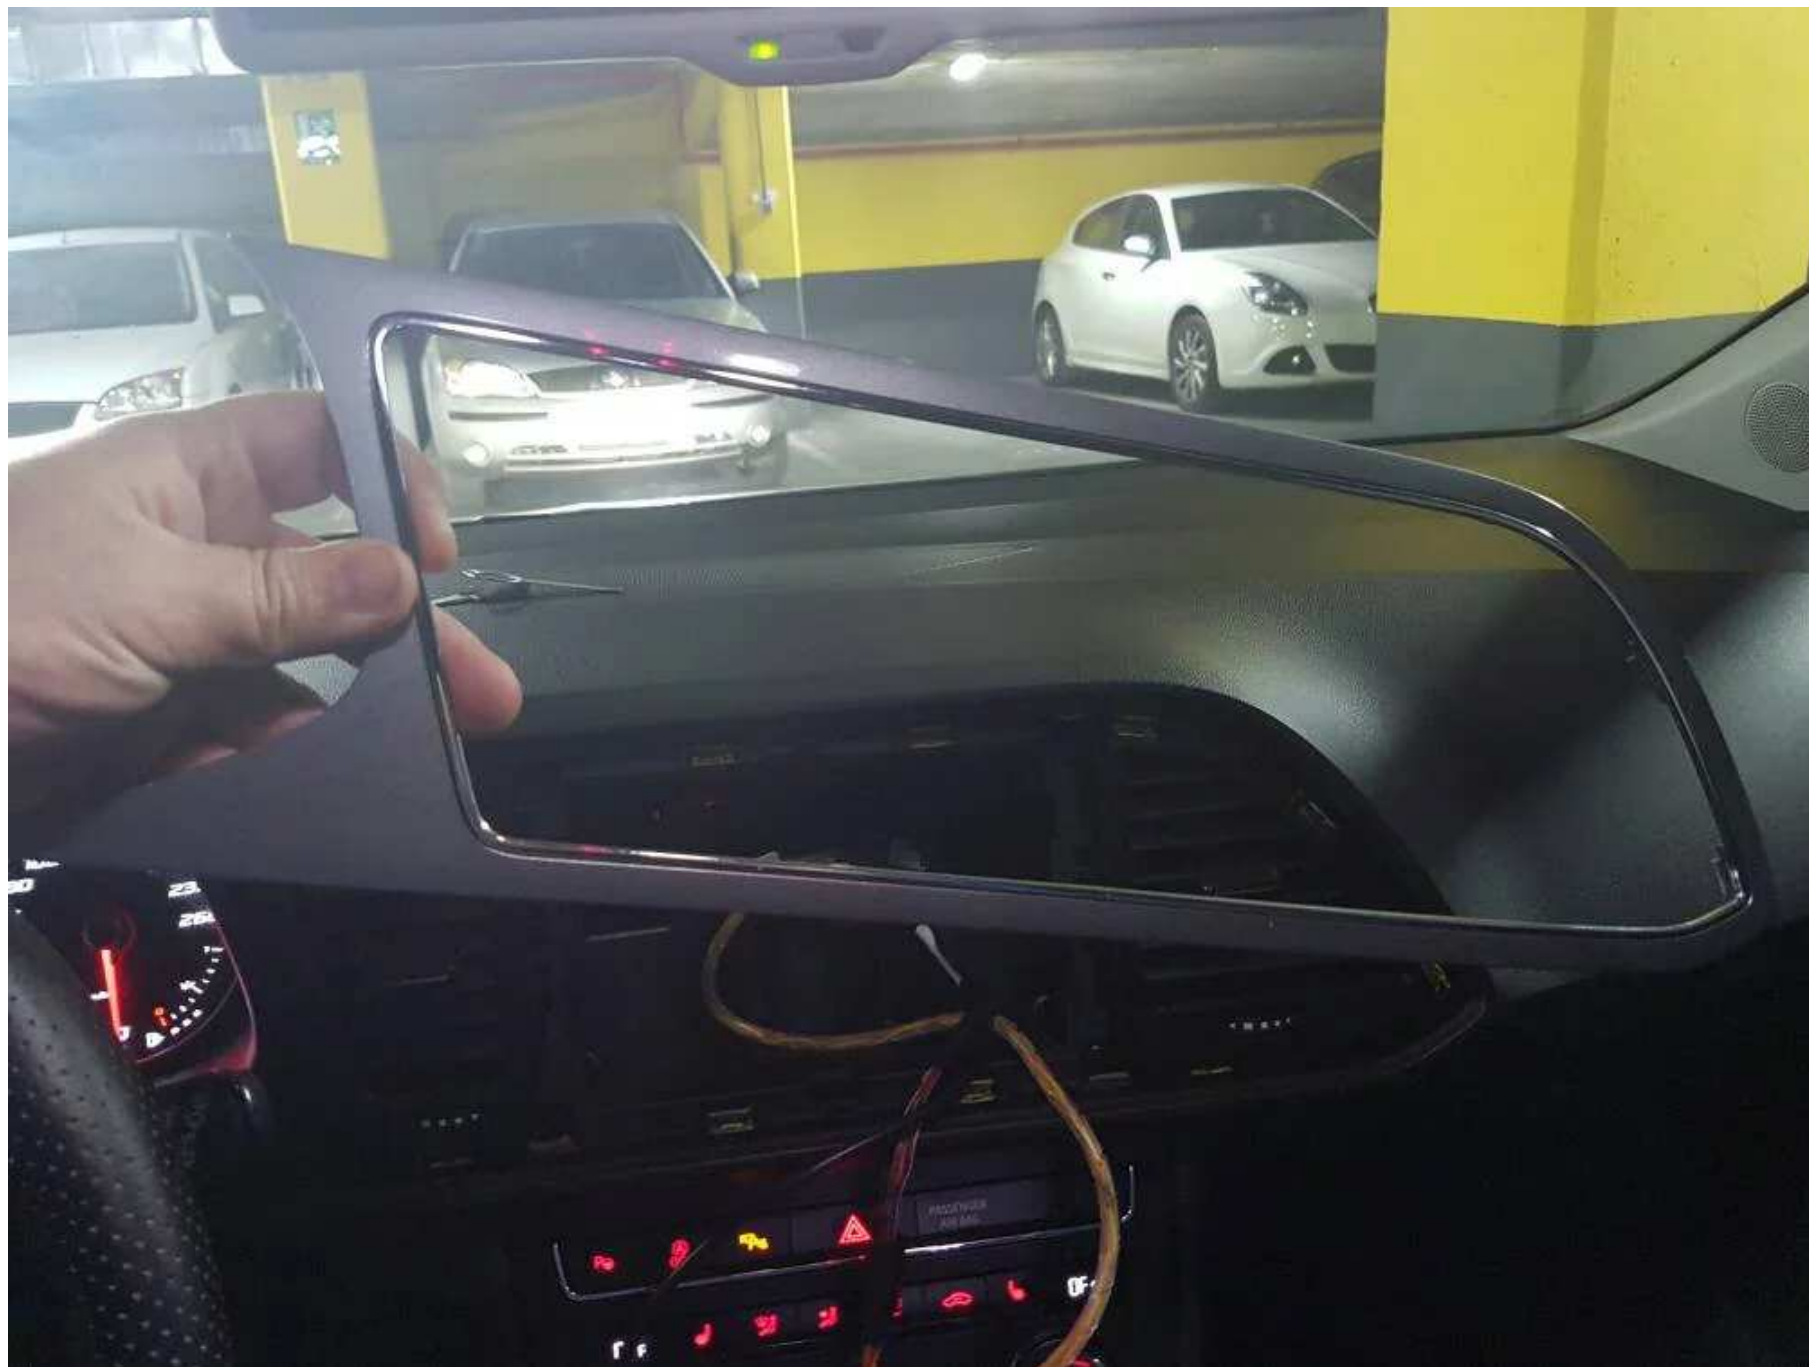

Once removed we will remove the plastic module where the screen is housed, also comes with air diffusers, is fastened with 6 screws: Once outside we have to cut the wing above and below so that the new screen is at ras, I've done it with a dremel ... it's just a piece of plastic no longer than a fourth, I cut out there And there Aunq I was trying not to pass once it is rass is ready ... We will hear the "click" on the side anchors of the screen ... signal that has been great! We put everything back in its place, and go! We got it ...



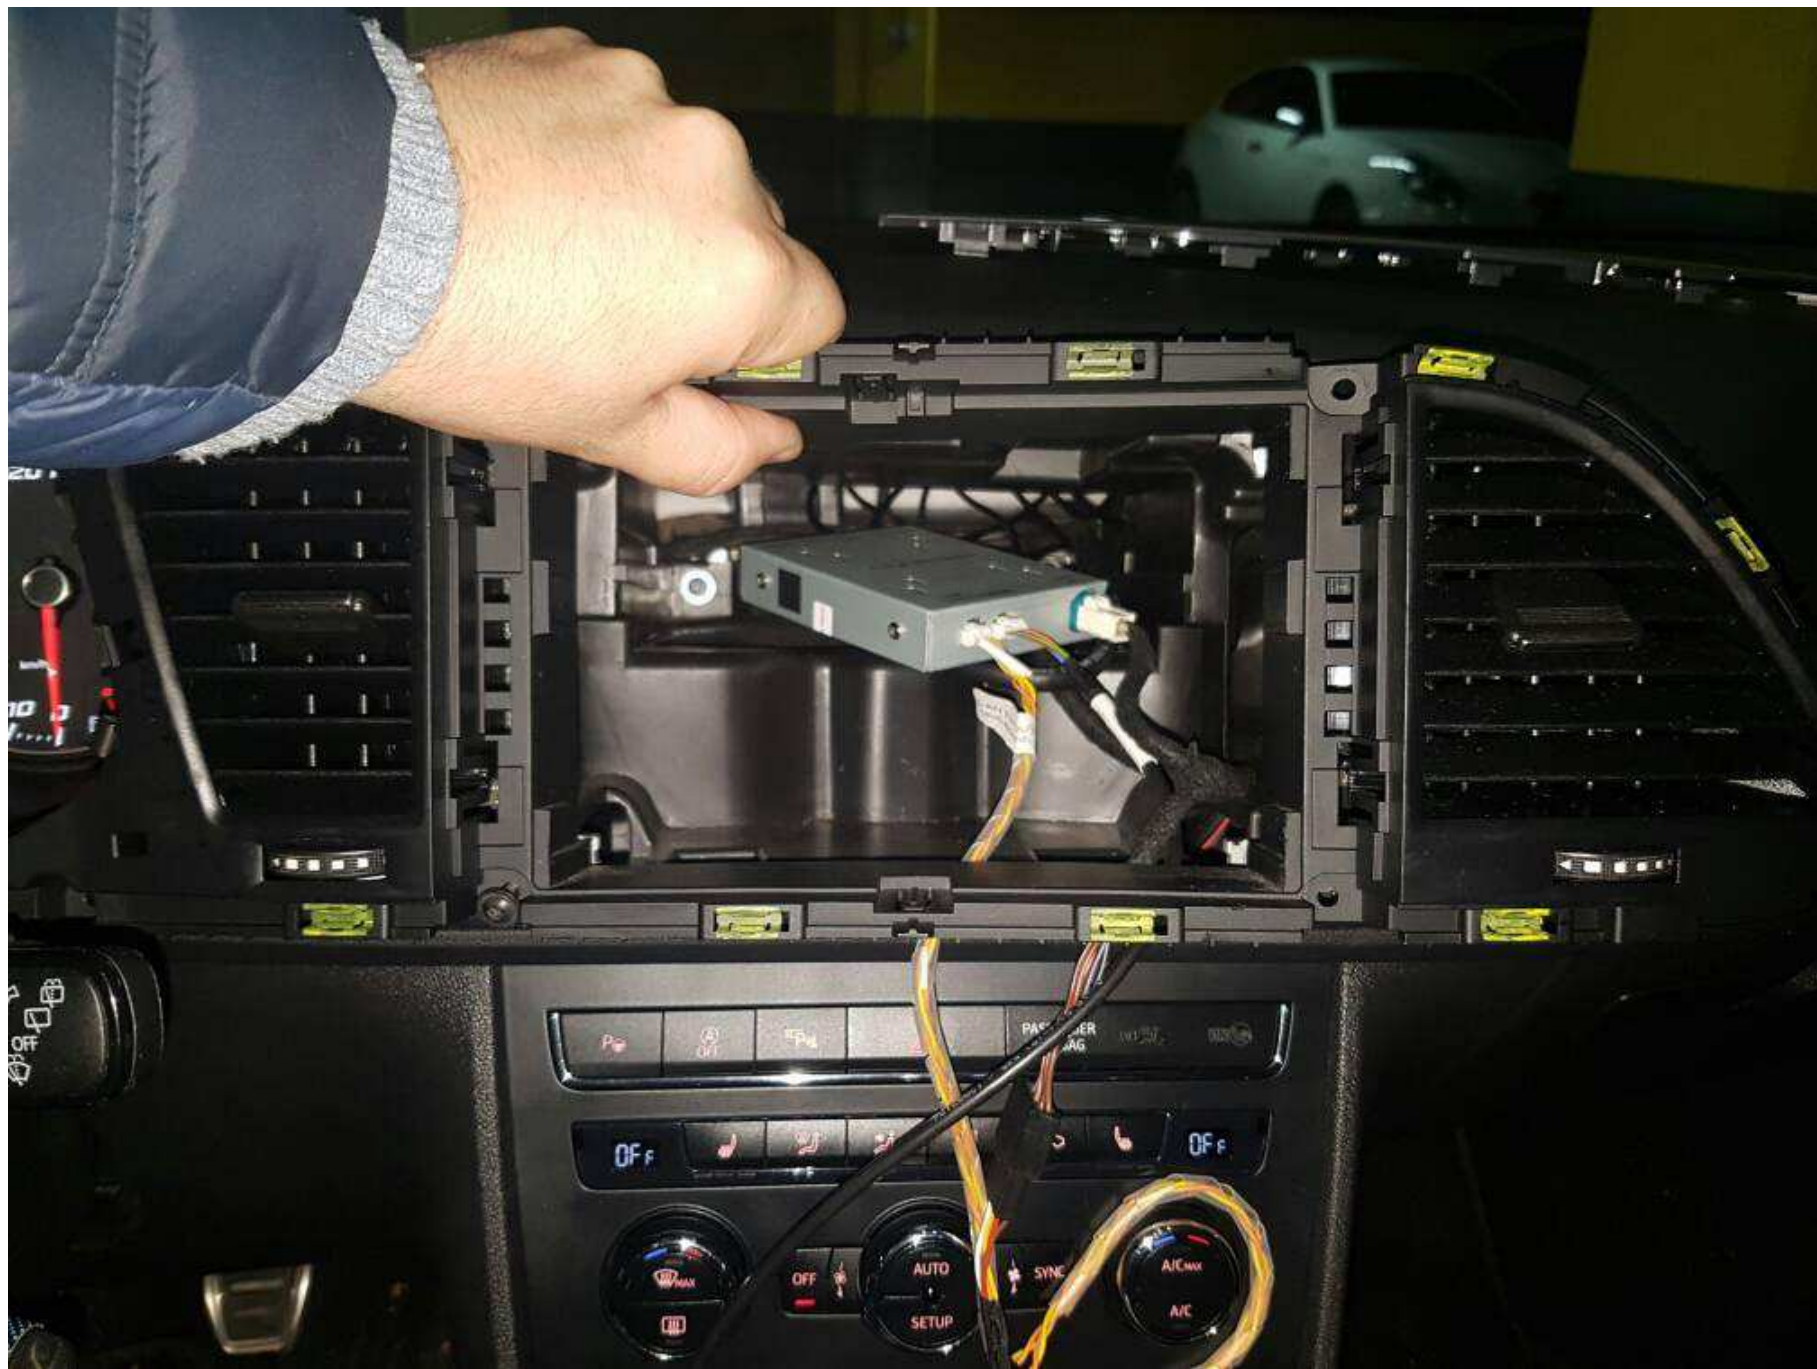










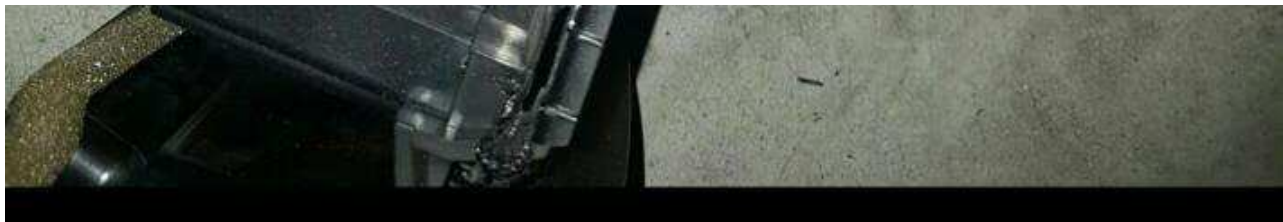



As we have cut the two wings of plastic the 2 staples above and below we do not have them to anchor the trim, in my case it has been very well attached, and I have not seen it necessary to put anything else. Sent from my SM-G935F via Tapatalk

